HANDYHEAT®
DANSK VARMEKABEL A/S

Application in HandyKit:

HandyKit 10 Standard :



- Heating cable on a drum
- Spindle
- Flexpipe
- Installation manual
- 10 year warranty

HandyKit 10 Komplet :



- Heating cable on a drum
- Spindle
- Flexpipe
- 80 m double adhesive tape
- Glue sticks
- Thermostat with floor sensor
- Installation manual
- 10 year warranty

Please contact our office for further information
or visit our website:

Dansk Varmekabel A/S
Lundagervej 102
DK-8722 Hedensted
Danmark
Tel: +45 7675 8030
Fax: +45 7675 8032
www.handyheat.net
info@handyheat.net

Manufactured by:
HANDYHEAT, DK-8722 Hedensted, Denmark
DVK-00307-001

HANDYHEAT®
DANSK VARMEKABEL A/S

HandyCable DVC-10



HANDYHEAT®
DANSK VARMEKABEL A/S

HandyCable DVC-10

Construction of the cable:


HandyHeat's DVC cable comprises of a twin elemnt resistance wire, coated with teflon, it has 2 kevlar inserts and is surrounded by a tinned copper earth shield and a final PVC outer jacket.

- Twin conductor heating cable manufactured pursuant to EN60335-1: 1994
- Only one 'cold' cable to thermostat
- Output 10 Watt per linear metre
- Rated voltage – 230 VAC/50 Hz
- 2 strong heating wires
- Longlife teflon insulation and kevlar reinforcement
- Safe earth shield
- Strong outer jacket
- Approvals by CE & SEMKO



HandyCable DVC-10 - 10 Watt/meter

Item number	Type	Power
5707524310152	DVC-10 15 m	150 Watt
5707524310251	DVC-10 25 m	250 Watt
5707524310350	DVC-10 35 m	350 Watt
5707524310459	DVC-10 45 m	450 Watt
5707524310558	DVC-10 55 m	550 Watt
5707524310657	DVC-10 65 m	650 Watt
5707524310756	DVC-10 75 m	750 Watt
5707524310909	DVC-10 90 m	900 Watt
5707524311104	DVC-10 110 m	1100 Watt
5707524311302	DVC-10 130 m	1300 Watt
5707524311500	DVC-10 150 m	1500 Watt
5707524311807	DVC-10 180 m	1800 Watt

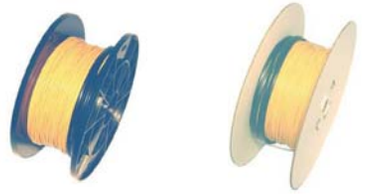


HandyCable FH-10 - 10 Watt/meter

Item number	Type	Power
5707524300153	FH-10 15 m	150 Watt
5707524300252	FH-10 25 m	250 Watt
5707524300351	FH-10 35 m	350 Watt
5707524300450	FH-10 45 m	450 Watt
5707524300559	FH-10 55 m	550 Watt
5707524300658	FH-10 65 m	650 Watt
5707524300757	FH-10 75 m	750 Watt
5707524300900	FH-10 90 m	900 Watt
5707524301105	FH-10 110 m	1100 Watt
5707524301303	FH-10 130 m	1300 Watt
5707524301501	FH-10 150 m	1500 Watt
5707524301808	FH-10 180 m	1800 Watt

Installation:

- Floor heating system : Recommended distance c-c by installation in concrete screeds. The cable is fixed with the help of the tape or melting glue.
  DVC-10/FH-10
  - C-C = 7 cm = 150 Watt / m²
  - C-C = 10 cm = 100 Watt / m²
  - C-C = 12,5 cm = 80 Watt / m²
- Suitable for primary heating or comfort heat source.
- Applied with HandyHeat thermostat.
- Insulation of the floor influences both floor heating system and operational costs.
- Maintenancefree - no need for service or maintenance.
- Applied in the HeatBoard system.



Application:

DVC-10 heating cable is suitable for :

- Floor heating systems in new floors or existent floor without floor heating.
- Floor heating system in small complicated rooms.
- Floor heating system where flexibility of power output is needed.

